



Beta EVO Factory Edition Fork Service Manual
Fork Disassembly, Seal and Bushing replacement and Assembly

2013-2023



CONFIDENTIALITY NOTICE

This message (including any attachments) contains information that may be confidential and is for authorized Beta Dealer's use only.

Jan-2023

Work must be performed by trained technician.
Beta USA, Inc.

Table of Contents

Introduction / Special Tools	Page 2
Fork Diagram and Component Description.....	Page 3
RH Fork (Rebound) Disassembly	Pages 4-10
RH Fork (Rebound) Assembly.....	Pages 10-18
LH Fork (Compression / Spring Side) Disassembly.....	Pages 18-23
LH & RH Fork Seal & Bushing Removal.....	Pages 23-25
LH & RH Fork Seal & Bushing Installation.....	Pages 26-29
LH Fork Assembly.....	Pages 30-36

Introduction

The SFF or Single Function Fork refers to each fork having a specific duty. The right fork function is rebound dampening. The left side utilizes a main spring, external spring pre-load adjustment and compression dampening.

The procedures in this manual must take place in a clean environment using professional and some specific tools.

Use caution not to damage the surface of the fork tubes, cartridge, rod, or any other suspension components.

When using the bench vise, always use protective jaws made from brass, aluminum or plastic. Always clean suspension components before assembly, using appropriate solvents and lint free towels to prevent contamination. Replace common wear parts such as seals, gaskets, bushings and O-rings every service interval.

CAUTION:

Always wear protective eyewear, gloves and appropriate clothing.

Before you perform any maintenance, be sure to read and carefully follow the detailed instructions described in this manual.

Incorrect disassembly/assembly of the fork may cause serious property damage, injury, or death to the rider.

Exclusive Tool



EVO Factory Fork cap tool AB-15037

Tools Required

38mm Seal driver & bullet

13mm Open end wrench

14mm Open end wrench

19mm Open end wrench

3/8 Drive impact wrench

3/8 Drive 12mm socket


3/8 Drive 6mm Allen

Measuring beaker

RH Fork

Fork Diagram

LH Fork

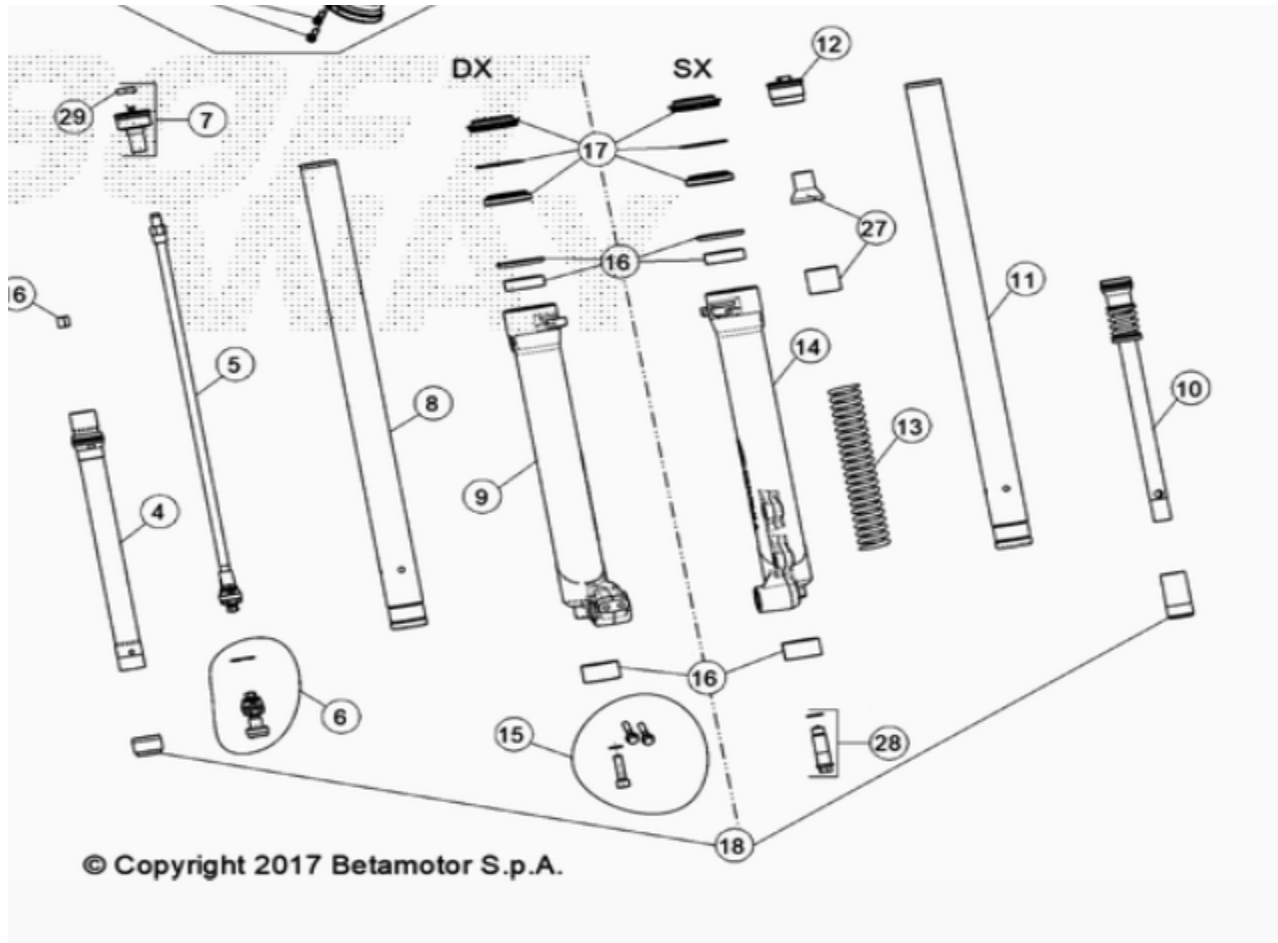

- | | |
|--------------------------------------|--------------------------------------|
| 4. Fork Cartridge cylinder | 10. Fork Cartridge |
| 5. Fork Cartridge rod | 11. Fork Slider Tube Assembly (Left) |
| 6. Fork Compression base valve | 12. Fork Cap Pre-load (Left) |
| 7. Fork Cap (Right) | 13. Fork main spring |
| 8. Fork Slider Tube Assembly (Right) | 14. Fork Outer Tube Assembly (LH) |
| 9. Fork Outer Tube Assembly (RH) | 16. Fork Bushing kit |
| 15. Screw Fastener kit | 17. Fork Seal kit |
| 16. Fork Bushing kit | 18. Fork Oil lock kit |
| 17. Fork Seal kit | 27. Fork pre-load spacer kit |
| 18. Fork Oil lock kit | 28. Adjustment Screw unit |
| 29. Fork Rebound adjustment knob | |


RH Fork Disassembly

(Dampening Side)

Clamp the inner fork tube assembly in a vise using soft jaws, or similar. Use enough tension to keep the outer fork tube from turning.



Document the rebound setting adjustment by counting the clicks clockwise. Next, open the rebound adjustment by turning knob counterclockwise before fork cap removal.

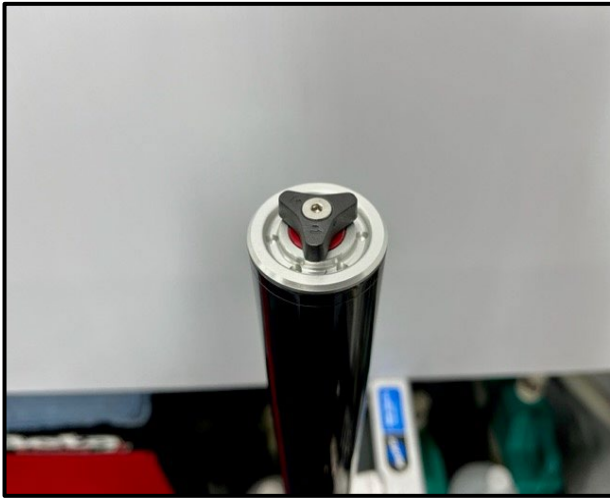


Install the EVO Factory fork cap tool (AB-15037) and unscrew the cap counterclockwise using a 19mm wrench or socket.






Unthread the fork cap from the inner tube assembly.

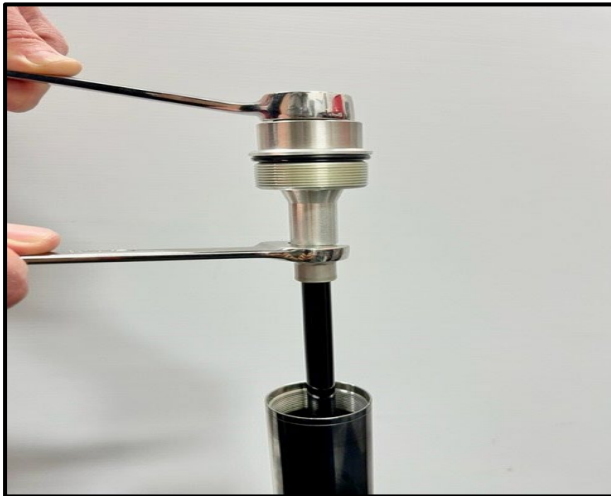

Install the EVO factory tool onto the fork cap. Place a 19mm box end wrench over the hexagon.
Install a 14mm open end wrench onto the cartridge rod lock nut.
Keep the 14mm wrench stationary and turn the 19mm wrench counterclockwise to unthread the fork cap from the cartridge rod.

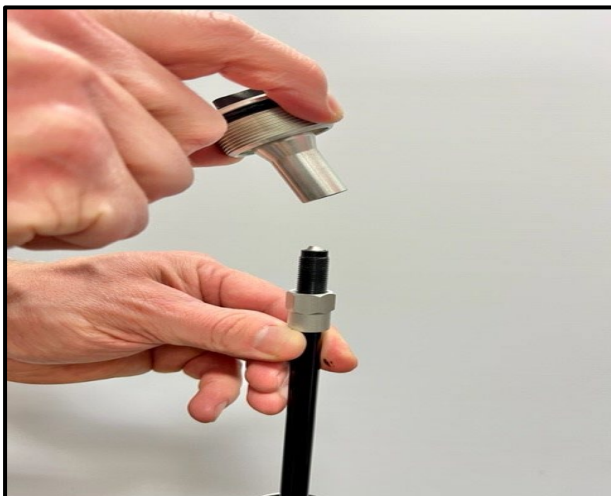


Remove the fork cap from the cartridge rod.



Drain the fork fluid.




Clamp and secure the outer fork tube using A bench vice with soft jaws.

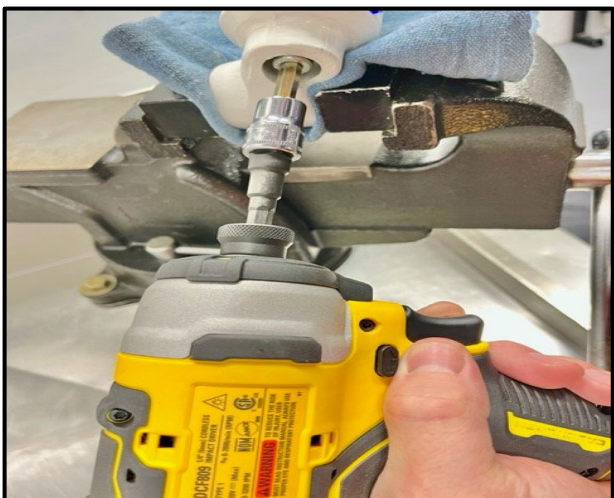

Insert a 6mm Allen socket into the bottom bolt. Use a 3/8 drive impact to remove the bolt.

Note: Using a ratchet does not always work, as the bolt requires a fast-spinning motion to unscrew from the cartridge.

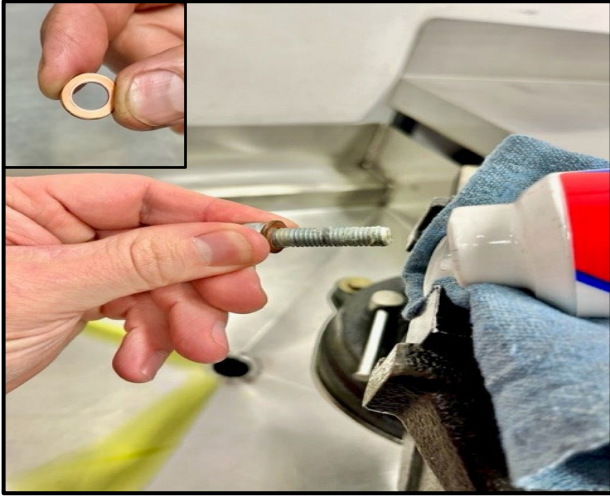


Remove the steel Allen bolt and copper washer from the bottom of the outer fork tube.

Note: The Allen bolt utilizes a copper washer and may be stuck on the bottom of the outer tube when the bolt is removed.



Remove the cartridge assembly from inside the inner fork tube assembly.

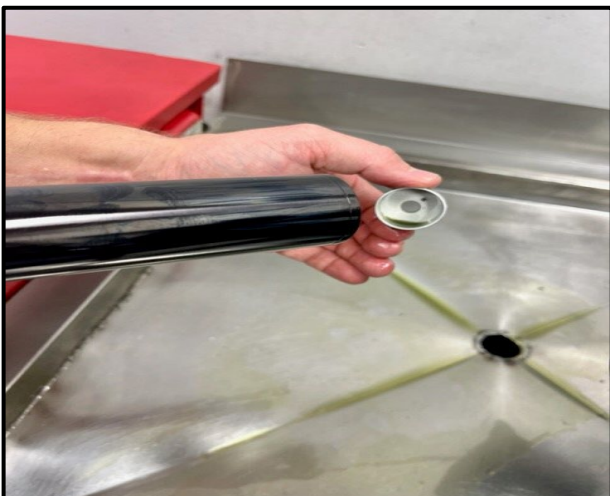

At the bottom of the (RH) inner tube you will find an oil lock collar. Remove it and keep with all other components removed from this side.

Note: *The inner tube assembly is specified to the (RH) fork.*



Remove the cartridge rod lock nut.



Thread the Allen bolt inside the base valve assembly.



Push the base valve assembly towards the inside of the cartridge cylinder using the bolt.



Use a pick to remove the circlip from the cylinder groove.



Remove the circlip from the cartridge cylinder.



Use the 6mm Allen bolt to remove the base valve assembly from the cartridge cylinder.



Push out the cartridge rod from the bottom of the cartridge cylinder. The purpose for the cartridge rod removal is to inspect all components, and thoroughly clean the cylinder and cartridge rod assembly.




Remove the Z-cut piston ring band from the rebound valve.

RH Fork Assembly (Dampening Side)



Thoroughly clean all suspension parts with an approved cleaning agent and allow the parts to dry before re-assembly.

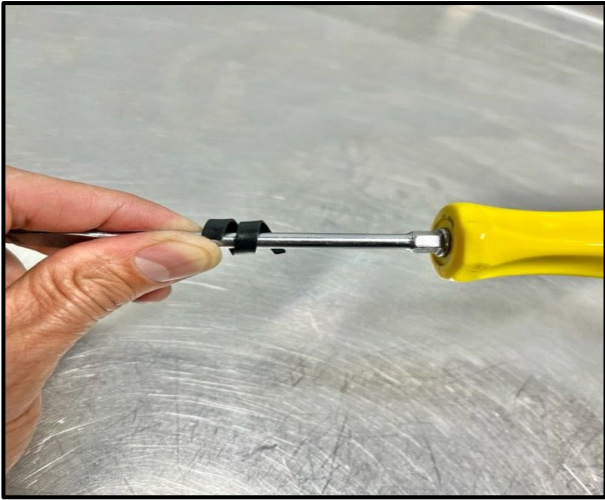

Wrap the Z-cut piston band around a screwdriver to create a spiral shape.



Wrap the Z-cut band around the rebound valve. Confirm the band is completely seated.



Insert the cartridge rod from the bottom of the cartridge cylinder. As the rebound valve enters the cylinder, make sure the band stays seated around the valve.



Use suspension grease on the base valve assembly O-ring. Replace the O-ring if compromised.



Insert the base valve assembly into the cartridge cylinder beyond the circlip groove.



Install the circlip into the cylinder groove. Push the cartridge rod downward to seat the base valve assembly against the circlip.



Thread the cartridge rod lock nut completely until fully bottomed.



Grease the bottom of the cartridge cylinder assembly.



The oil lock collar has a dimple inside of it and will slide over the bottom of the cartridge cylinder.



Important: The dimple inside the oil lock collar **MUST** line up with the steel point on the bottom of the base valve assembly.



Install the oil lock collar over the cylinder. A useful tip is when installing to push down and turn until the point and dimple mate with each other. The grease will help keep the oil lock collar in position.



Tricky Situation: Carefully place the cartridge cylinder assembly into the inner tube without the oil lock collar falling off. If this happens, repeat the step above and lower the external tube assembly over the cartridge assembly. Clamp the external with the bench vise.



Inspect the copper washer and place onto the steel Allen bolt. Replace the copper washer if compromised.



Apply a small amount of **BLUE** thread locking agent to the Allen bolt.



Thread the steel Allen bolt inside the bottom of the outer tube. This will tighten down the cartridge assembly.



Tighten the 6mm Allen steel bolt to 22Nm. Make sure the bolt is tight and does not continue to turn.




Using a ratio-rite or measuring beaker, fill with Liqui Moly 5wt. fork fluid in the amount of 297ml and pour inside the inner fork tube.




Use you palm to cover the top opening of the inner tube and compress downward to help force the fork fluid into the cartridge. Repeat this step 2-4 times.



Cycle the cartridge rod up and down until the cartridge rod has a consistent resistance throughout the entire stroke.

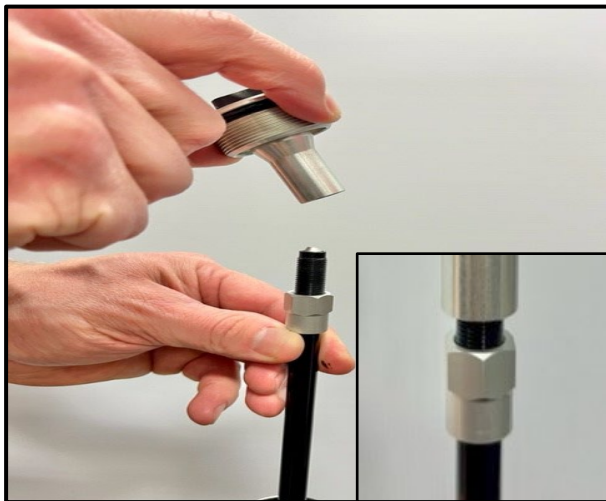


Thread the fork cap onto the cartridge rod until fully bottomed.
Note: An approximate 6mm gap between the cap and lock nut confirms the cap is completely threaded.

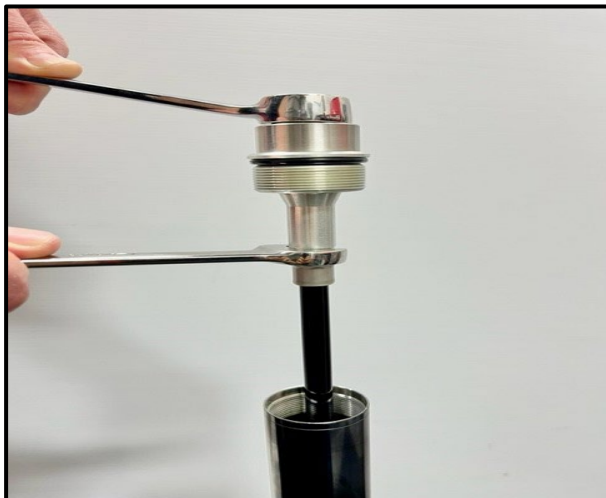

Install the EVO fork cap tool onto the fork cap. Use your 19mm to tighten the fork cap, while holding the 14mm wrench on the lock nut. Torque fork cap to 22Nm.



Thread the fork cap inside the inner tube until secure.

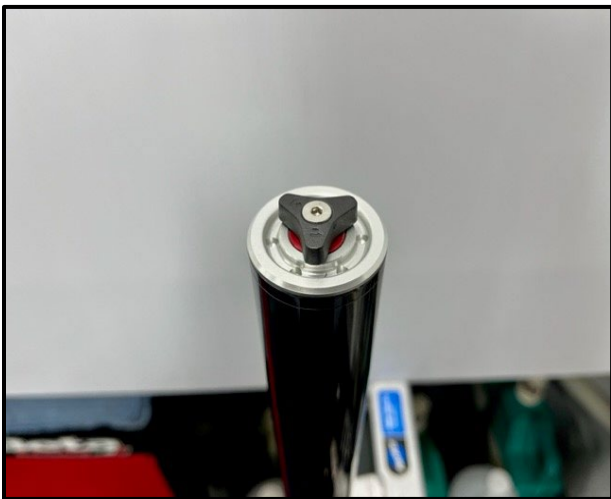

Turn rebound adjustment knob clockwise until it bottoms. Set your rebound to the documented setting by turning out counterclockwise. Factory setting is 22 clicks out.


LH Fork Disassembly (Compression / Spring Side)



Clamp the inner fork tube assembly in a vise using soft jaws, or similar. Use enough tension to keep the outer fork tube from turning.



Install a 6mm Allen into the pre-load adjuster and record the number of revolutions you turn clockwise.

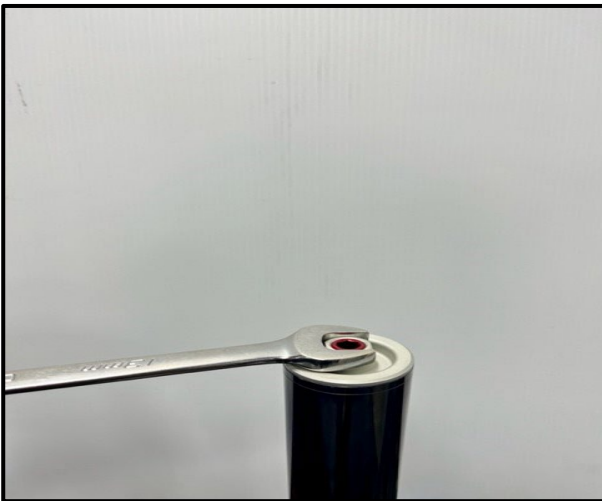

Use a 13mm open end wrench to unscrew the fork cap from the inner tube assembly.




Remove the fork cap and lower the inner tube assembly downward until it bottoms.



Remove the pyramid shaped plastic pre-load spacer underneath the fork cap.



Remove the cylindrical shaped plastic pre-load spacer on top of spring.

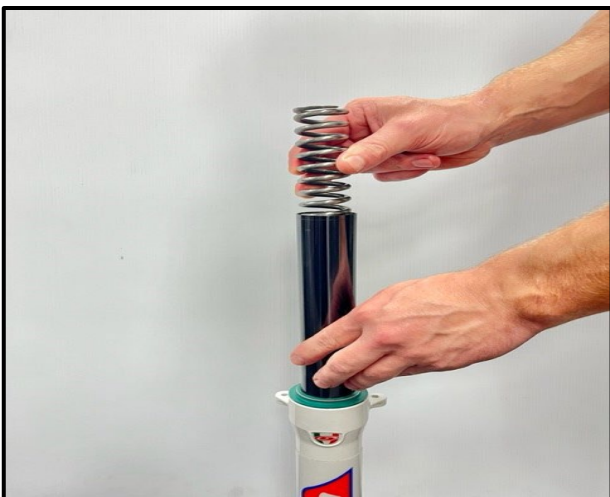


Remove the spring from the inside of the inner fork tube.



Remove the spring from the inner tube assembly.



Drain the fork fluid.

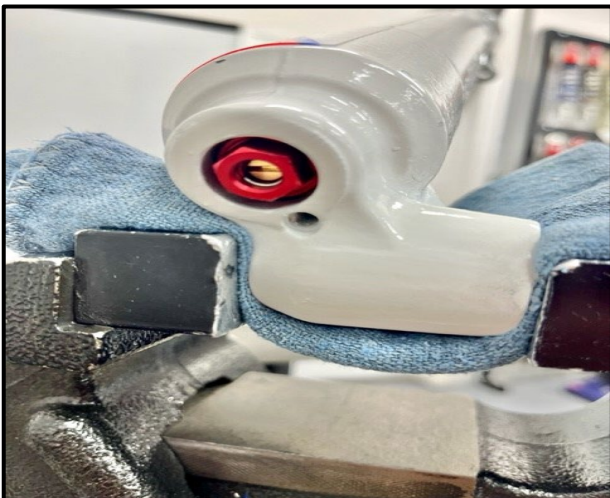

Clamp the outer fork tube with a bench vise using soft jaws.



Re-install the fork spring with the inner tube collapsed.




Using a ratchet with 12mm 6pt socket, turn socket counterclockwise to remove the compression adjustment bolt.

Note: Apply pressure on the fork spring while unscrewing the adjustment bolt if you are unable to remove it, or the bolt continues to spin.



Remove the compression adjuster bolt from the bottom of the outer tube assembly.

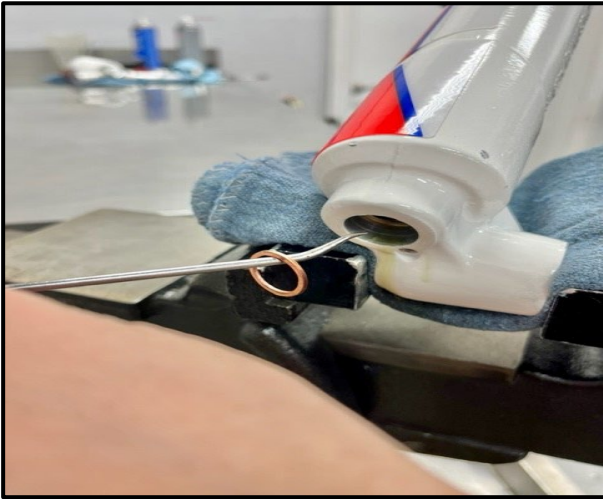

Remove the copper washer gasket if it doesn't come out with the compression adjuster bolt.

Note: Sometimes the copper washer will adhere to the bottom of the outer tube, so a pick may be necessary to remove it.




Remove the cartridge from the inner fork tube assembly.

LH & RH Fork Seal & Bushing Removal



Use a flathead screwdriver to remove the dust seal from the outer tube assembly.

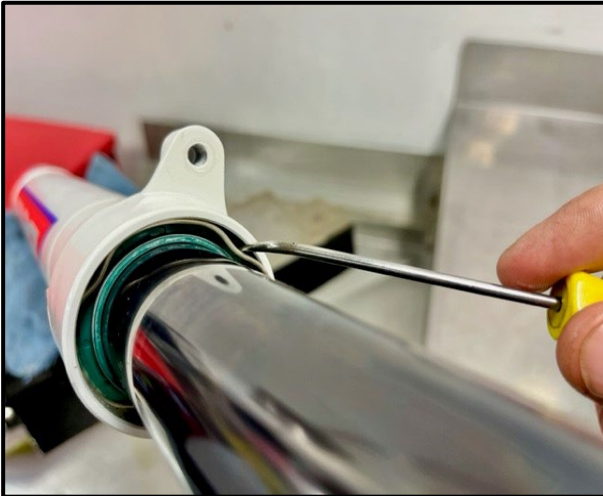

Use a 45-degree pick to remove the oil seal housing circlip.



Using two hands on the inner tube assembly, pull apart the inner tube from the outer tube assembly.



Note the orientation and direction of the fork seals, circlip, oil seal washer, guide bushing, slide bushing, and remove them from the inner fork tube.




You will find a **RED** anodized oil lock collar at the bottom of the inner tube assembly when you pull the externals apart.

Note: This inner tube is specific for the (LH) fork internal and external parts.



The aluminum non-anodized oil lock collar is specific to the (RH) fork inner tube.

Note: This inner tube is specific for the (RH) fork internal and external parts.

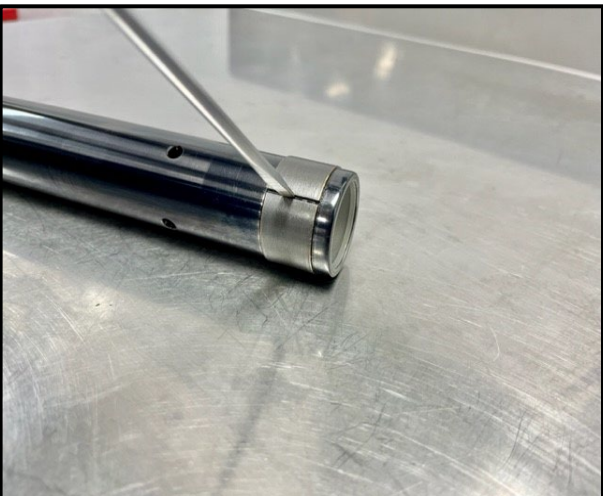

Remove the slide bushing by using a flathead screwdriver.

LH & RH Fork Seal & Bushing Installation



Install a new slide bushing onto the inner tube assembly.




Insert the inner tube into the outer tube assembly.

Note: Inside the RH fork inner tube is open and specific to the RH internals and external outer tube.



Install the slide bushing over the inner tube assembly.

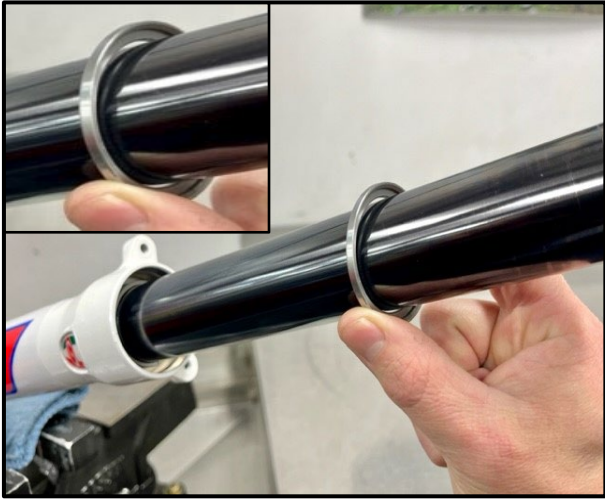

Install the oil seal washer onto the inner tube assembly.

Note: The oil seal washer with the recessed area must face upward when installing.



Install the **RED** oil lock collar into the bottom of the inner fork tube with the flat side of the collar facing downward. Slide the inner tube with oil lock into the outer tube.

Note: Inside the bottom of the LH fork inner tube is blocked and only allows the collar to fit inside the designated area. LH internals and external are specific to this fork leg.



Use a 38mm fork seal driver against the oil seal washer to install the guide bushing into the outer fork assembly.




Use synthetic suspension grease on the inside of the new “SKF” oil seal.
Note: The oil seal direction is recessed side facing downward.



Use a 38mm fork seal bullet to install the oil seal onto the inner tube assembly.



Use a 38mm fork seal driver against the oil seal to install it into the outer fork assembly.
Note: Be sure the oil seal is completely bottomed exposing the entire circlip groove.

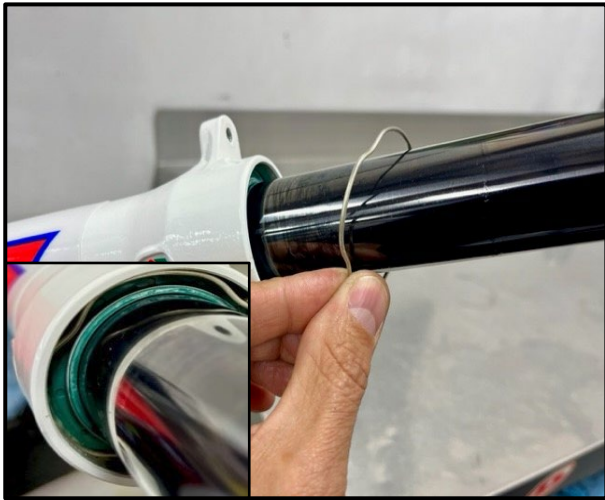


Install the oil seal housing circlip into the outer fork tube assembly groove.

Note: Make sure the circlip is completely seated inside the groove.



Use synthetic suspension grease on the inside of the new “SKF” Dust seal.

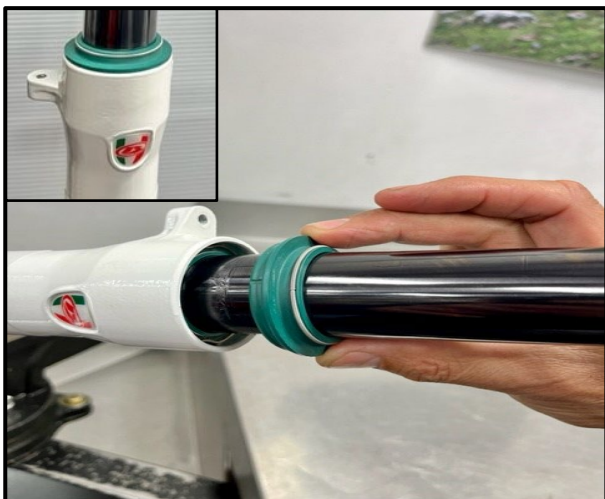

Install the dust seal onto the inner tube and press into the outer fork tube assembly .

Note: Be sure the dust seal is completely seated.

LH Fork Assembly

(Compression / Spring Side)

Install the cartridge into the (LH) inner tube.



To help you understand, after you install the cartridge inside the LH inner tube it will fit inside the **RED** oil lock collar located at the bottom.



This is what the cartridge would look like inside when it is installed with external. Notice you can see the threads of the cartridge in the center of the oil lock collar.



Inspect the copper washer and place onto the compression adjuster bolt. Replace the copper washer if compromised.




Apply a small amount of **BLUE** thread locking agent to the compression adjuster bolt.



Re-install the fork spring with the inner tube collapsed. Apply pressure on the spring to keep the cartridge bottomed.



Install the compression adjuster bolt and thread it into the cartridge from the bottom of the outer tube assembly.

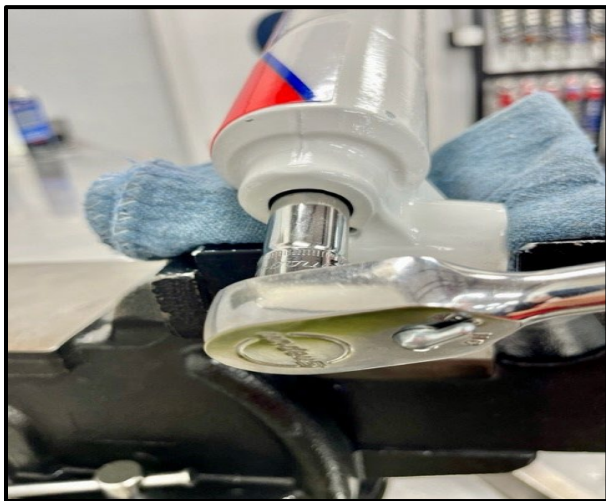


Install a 12mm 6pt. socket with ratchet onto the compression adjuster bolt.



Apply downward pressure onto the fork spring while you tighten the compression adjuster bolt with the 12mm socket and ratchet.
Note: The spring pressure will keep the cartridge from spinning, allowing the bolt to tighten.



If you are unable to get the compression adjuster bolt tight using a ratchet, use a 12V impact to assist tightening.

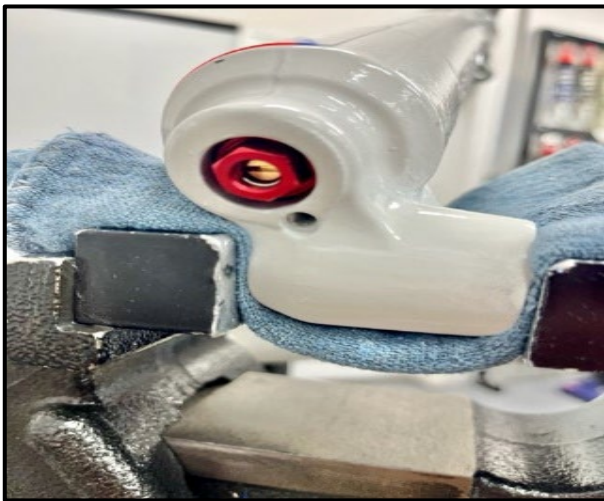


Torque the compression adjuster nut to 21 Nm.



Using a ratio-rite or measuring beaker, fill with Liqui Moly 5wt. fork fluid in the amount of 297ml and pour inside the inner fork tube.



Pull up and down 6-8 inches on the inner tube to help circulate fork fluid through the cartridge. Repeat this step 2-4 times.

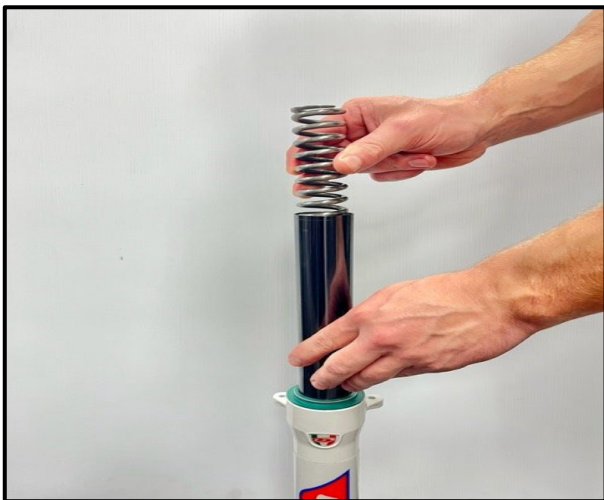

Install the fork spring.




Install the cylindrical shaped plastic spring pre-load spacer on top of the fork spring.



Install the pyramid shaped plastic spring pre-load spacer on top of the cylindrical spacer.



Install the fork cap.

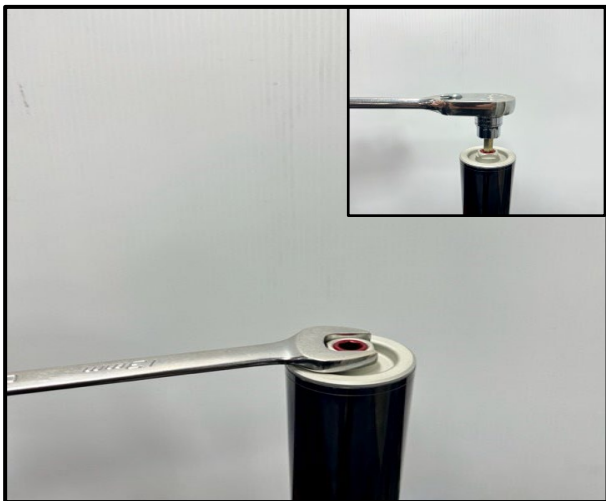

Use a 13mm open end wrench to tighten the fork cap. Set your pre-load to desired setting.

Fork service is complete 😊

